



A WORLD LEADER IN FUME  
EXTRACTION TECHNOLOGY

# DustPRO 50

Last Updated on 02.02.2022



Industrial particle and dust extractor.

BOFA's DustPRO 50 extraction unit has been developed to help with the filtration of swarf and small particulates during processes such as routing, mechanical engraving, grinding and turning.

One of the main problems with other router extraction relates to the type of pump used. Most have brushed motors which are noisy in operation and frequently burn out.

The pump used in the DustPRO 50 is brushless and designed for continuous running for long periods of time before servicing.

## Technology



ProTECT service  
plan



SureCHECK  
quality standard

## Key features of the DustPRO 50

Filters with long life and low replacement cost  
Standard

Filter change / system fail signal  
Optional

Remote stop / start interface  
Optional

## Technical specification

1. Unit lid

2. On / off switch

3. Power cable inlet

4. Hose inlet connection -  
10-18mm (Optional)

5. Feet

6. Handle

7. Exhaust outlet

8. Motor cooling inlet

9. Stop / start connection  
(optional)


10. Lid latches

Contact BOFA at <https://bofainternational.com/en/contact/>

<https://bofainternational.com/en/portal/datasheets/dustpro-50/>




Approvals: REACH and RoHS. See individual product technical data for specific accreditations

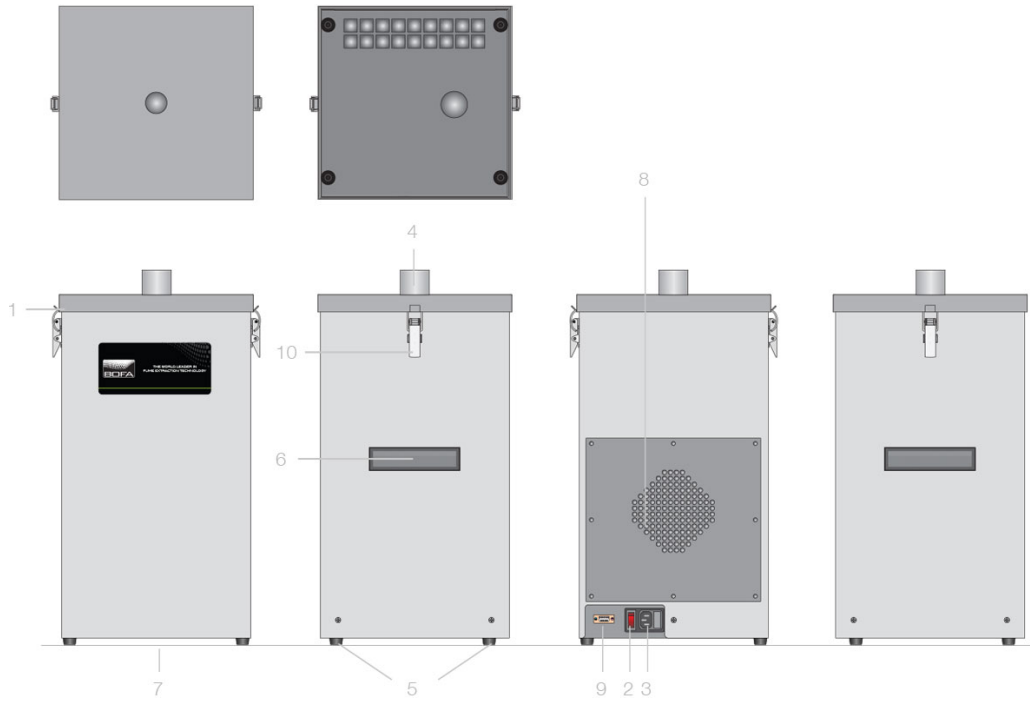

### Airflow through filters

-  Bag filter
-  Clean air
-  Contaminated air
-  Particulate

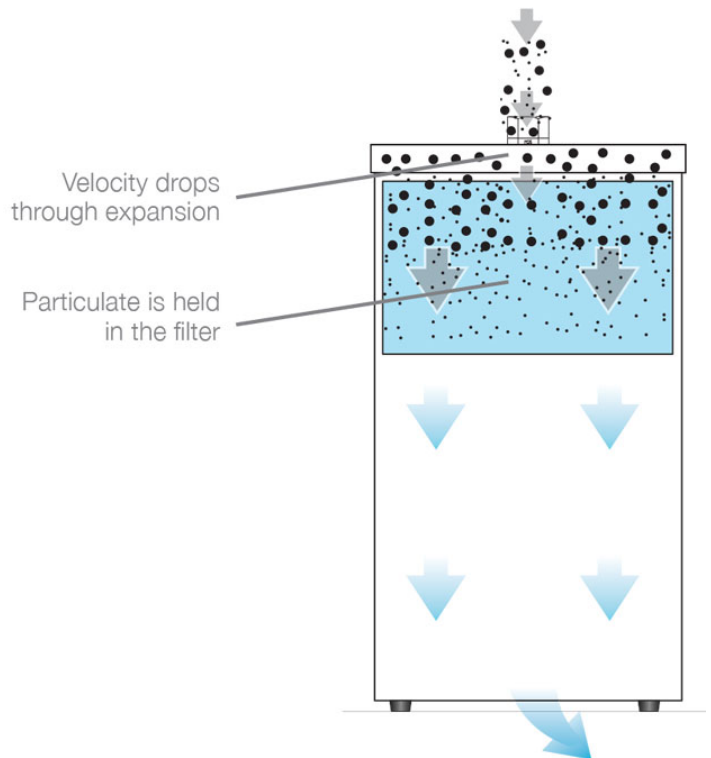

### Technical data

	EU	US
Dimensions (HxWxD)	575 x 320 x 295mm	22.64 x 12.60 x 11.61"
Cabinet construction	Powder coated mild steel	Powder coated mild steel
Airflow / pressure	80m <sup>3</sup> /hr / 100mbar brushless motor	47cfm / 100mbar brushless motor
Electrical data	230v Single-phase 1~ 50/60Hz Full load current: 2.8 amps / 0.4kw	116v Single-phase 1~ 50/60Hz Full load current: 6 amps / 0.5kw

## Technical data

Noise level	< 64dBA (at typical operating speed)	< 64dBA (at typical operating speed)
Weight	23kgs	50lbs
Approvals	UKCA and CE	UKCA and CE

## Bag filter specifications

Filter holding capacity	6.4 Ltrs
Filter media	Polyester
Filter media construction	Bag filter
Filter efficiency	95% @ 0.9 microns

## Part numbers

Model	Voltage	Part number	24V stop / start
DustPRO 50 powder coated	230V	D0242A	A2001
	115V	D0241A	A2001
DustPRO 50 with 18mm ID cable gland powder coated	230V	D0342A	A2001
	115V	D0341A	A2001

## Replacement filters

Model	Bag filter part no.
DustPRO 50	A1030135
DustPRO 50 filter pad	A1030085

*Datasheet correct at time of publishing.*

*Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOCs, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.*

**Important Notice:** *Many factors beyond the control of BOFA can affect the use and performance of BOFA products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.*

*Think before you print! Please consider the environment before printing this document.*

